




# Weatherford®

## McAllister

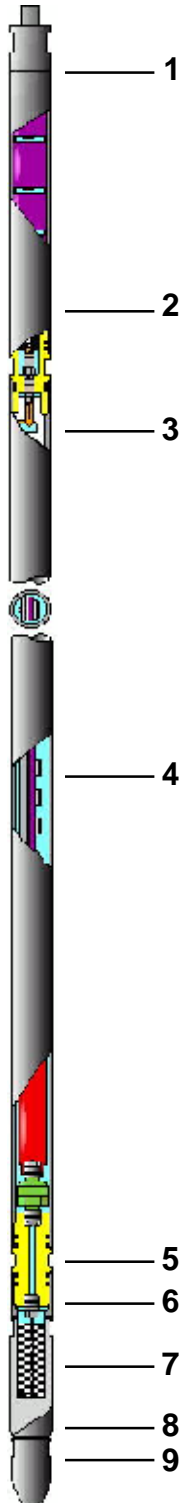

### Dimensions & Weight:

Outside Diameter  
 5,000 thru 16 000 psi ..... 1.25 inches  
 20,000 psi ..... 1.31 inches  
 Length with Battery Pack ..... 56 inches  
 Weight ..... 13.6 lbs

### Pressure Specifications:

Available Ranges ..... 5,000 - 25,000 psi  
 Accuracy (% Full Scale)  
 5,000 psi ..... 0.015  
 10,000 psi ..... 0.012  
 16,000, 20,000 & 25,000 psi ..... 0.015  
 Resolution (% Full Scale) ..... <0.00006

### Temperature Specifications:

Calibrated Temperature Range  
 5,000 psi thru 10,000 psi ..... 77 to 300°F (25 - 150°C)  
 15,000 psi thru 20,000 psi ..... 77 to 350°F (25 - 177°C)  
 Temperature Accuracy ..... +/- 0.27°F (0.15°C)  
 Temperature Resolution ..... 0.01°F (0.005°C)

### Miscellaneous:

Selective Delay ..... 0 sec - 18 hrs  
 Intervals of Readings ..... 1 sec - 1.0 hrs  
 Total Samples ..... 62,000 - 124,000 Data Sets  
 Maximum Battery Life ..... Standard Pack 35 Days

### Standard Configuration

Part #	Material	Description
1	I925	Wireline Adapter Housing Plug
2	HC®	Battery Pack Housing
3	I925	I/O Contact Adapter
4	HC®	Main Circuit Board Housing
5	I625	Transducer Isolation System
6	I925	Transducer Adapter
7	SS316	Buffer Tube
8	SS316	Wireline Buffer Tube Bullnose
9	SS316	Tapered Nose Cone

\*\* Proprietary metal to metal seal used on all unions

### Material Legend

SS316	Stainless Steel 316
I625	Inconel 625
I925	Inconel 925
HC	Hastelloy® C

Above Specifications subject to change without notice.